



- 13/2 **Power Management System**
- System overview
- 13/2 - Overview
- 13/2 - More information

- 13/3 **SENTRON Power Monitoring Devices**
- General data
- 13/3 - Overview
- 13/4 - Benefits
- 13/5 - Application
- 13/5 - More information
- PAC3100 power monitoring devices
- 13/6 - Selection and ordering data
- 13/6 - More information
- PAC3200 power monitoring devices
- 13/7 - Selection and ordering data
- 13/7 - Accessories
- 13/7 - More information
- PAC4200 power monitoring devices
- 13/8 - Selection and ordering data
- 13/8 - More information
- Expansion modules
- PAC PROFIBUS DP
- 13/9 - Overview
- 13/9 - Application
- 13/9 - Selection and ordering data
- PAC RS485
- 13/10 - Overview
- 13/10 - Application
- 13/10 - Selection and ordering data

Technical Information

is available at
www.siemens.com/lowvoltage/support

under Product List:
 - Technical Specifications


under Entry List:
 - Updates
 - Downloads
 - FAQ
 - Manuals/Operating instructions
 - Characteristic curves
 - Certificates

and at
www.siemens.com/lowvoltage/configurators
 - Configurators

Power Management System

System overview

Overview

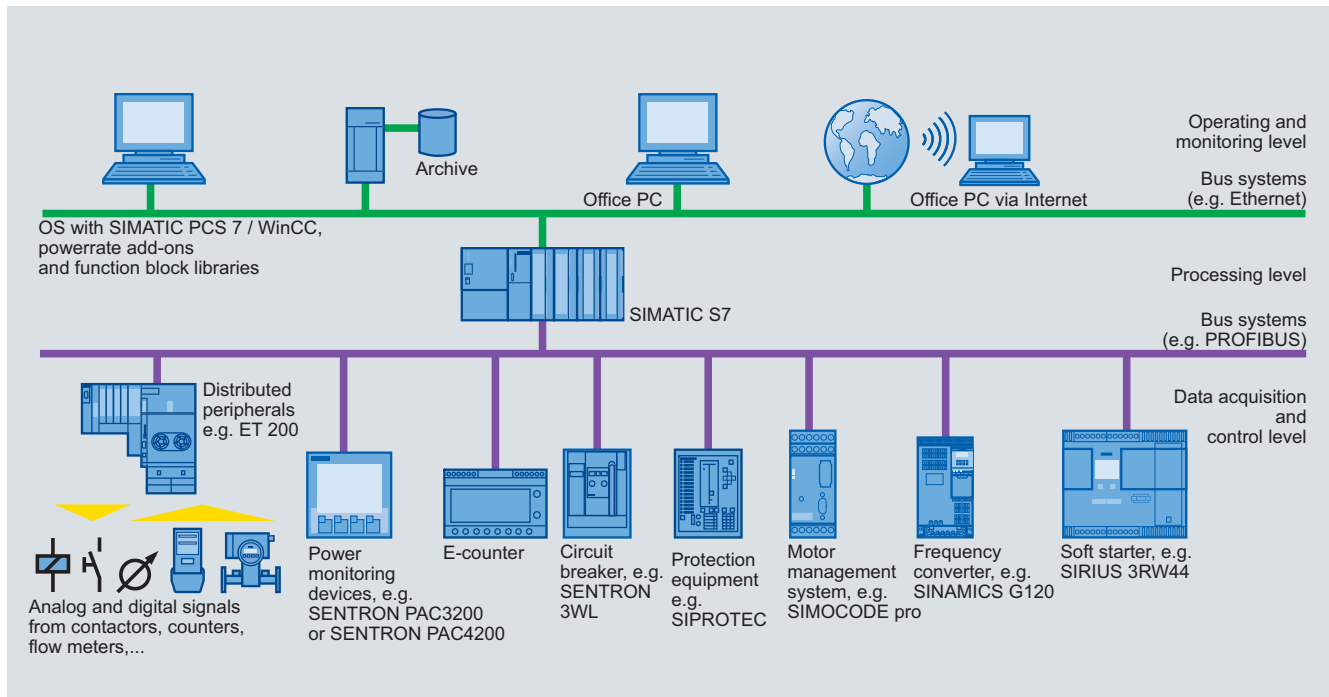

Power Management System: Configuration and assembly of all required components

The continuous increase in energy prices is leading to higher operating costs and can pose a threat to a company's competitiveness.

The goal of our Power Management System is to optimize operating costs and increase plant availability.

As part of TIA and TIP it is fully integrated in the industrial technologies of production and process automation (SIMATIC PCS 7 and SIMATIC WinCC) from Siemens. This means lower costs of implementation and all the following benefits:

- Consistent product design
- Standard components
- Open interfaces
- Uniform operating philosophy
- System-tested, certified products
- Global availability in high Siemens quality
- Optimum support from Siemens hotline

In other words: With power management you can make full use of all the potential for optimization provided by a consistent power management solution.

The power management system comprises both hardware components and software components.

Hardware components

The hardware components are:

- Communication-capable measuring devices such as
- SENTRON PAC3200 and SENTRON PAC4200
- Switching and protection devices (3VL/3WL)
- The SIMOCODE pro motor management system
- E-counters
- Protection equipment such as SIPROTEC
- and diverse other communication-capable devices

Software components

The software components are:

- SIMATIC PCS 7 powerrate/SIMATIC WinCC powerrate as expansions to SIMATIC PCS 7 and SIMATIC WinCC
- SIMATIC PCS 7 Library PAC3200 as driver/faceplate for SIMATIC PCS 7
- Switch ES Power

SIMATIC PCS 7 powerrate, SIMATIC WinCC powerrate

SIMATIC PCS 7 and WinCC powerrate are expansions to PCS 7 and WinCC respectively and throw light on power consumption from the infeed to the load:

- Identification of power-intensive consumer devices and processes in order to introduce measures for improving power efficiency
- Comparison of consumption profiles for greater efficiency of process design, batch-related consumption recording
- Optimizing the company according to energy parameters based on an assessment of consumption and costs
- Complying with the contractually agreed power limit, thus preventing higher power supply costs or penalty payments

SIMATIC PCS 7 Library PAC3200 and PAC3200 function block library for SIMATIC WinCC

The SIMATIC PCS 7 and WinCC function block libraries for PAC3200 enable optimum integration of the SENTRON PAC3200 power monitoring device in SIMATIC PCS 7 and WinCC respectively.

More information

Hardware components of the Power Management System are dealt with in this chapter, its software components in Chapter 18.

You can find more information on the Internet at: www.siemens.com/powermanagementsystem

Overview



Instrument variants		PAC3100	PAC3200	PAC4200
Functional overview				
Basic measurement variables				
Voltage, current		✓	✓	✓
Neutral conductor current		✓	--	✓
Apparent power, active power, reactive power		✓	✓	✓
Power factor		✓	✓	✓
Power factor of the fundamental wave		--	--	✓
Frequency	Of the reference phase	✓	✓	✓
Min/max values	Slave pointer function With date & time	✓ --	✓ --	✓ ✓
Power measurement				
Apparent energy		--	✓	✓
Active energy, reactive energy	Input Output Balance	✓ ✓ ✓	✓ ✓ --	✓ ✓ --
Number of tariffs	Apparent, active and reactive energy	1	2	2
Daily energy values for 365 days	Apparent, active and reactive energy	--	--	✓
Power averages of the last measurement period	Active and reactive power average with min / max value	✓	✓	✓
Load profile record		--	--	✓ max. 3840 entries ¹⁾
E-counter for S ₀ signal at a digital input	Electrical energy Any energy	-- --	✓ --	✓ ✓
Accuracy class for active energy	According to IEC 62053-21 / 62053-22	Class 1	Class 0.5S	Class 0.2S
Accuracy class for reactive energy	According to IEC 62053-23	Class 3	Class 2	Class 2
Monitoring of state of the plant and quality of the network				
Configurable displays	For presenting up to 4 measured quantities	--	--	4
Operating hours counter	Operating hours of loads	--	✓	✓
Sliding mean values	<i>U, I, S, P, Q, LF</i>	--	--	✓
THD voltage, current		--	THD-R	THD
Distortion current strength		--	--	✓
Phase angle, phase displacement angle		--	--	✓
Unbalance	Voltage Current	--	$U_{nba} I_{nba}^{2)}$	$U_{nb} I_{nb}^{3)}$
Harmonics in voltage, current		--	--	3rd to 31st
Limit value monitoring	Max. number of limit values	--	6	12
Boolean logic	For limit values Inputs	-- --	✓ --	✓ ✓
Event memory for operation, control and system-related events	Including time stamp	--	--	✓
Battery backup for min / max values		--	--	✓
System integration and communication				
Ethernet (integrated)		--	10 Mbit/s	10/100 Mbit/s
• Protocol	Modbus TCP	--	✓	✓
• Gateway	Ethernet <--> RS485 (Modbus)	--	--	✓
PROFIBUS DP (V1)		--	Expansion module optional	
RS485		Integrated	Expansion module optional	
• Protocol	Modbus RTU	✓	✓	✓
Number of expansion modules		--	1	2
Integrated digital inputs	Number Multifunctional	2 --	1 ✓	2 ✓
Integrated digital outputs	Number Multifunctional	2 ✓	1 ✓	2 ✓
Installation plan				
Dimensions (L x W x D)	In mm	96 x 96 x 56	96 x 96 x 56	96 x 96 x 82
Mounting depth	PAC PAC with expansion module (in mm)	51 --	51 73	77 99
Panel cut-out (L x W)	In mm	92 x 92	92 x 92	92 x 92
Standards and approvals				
CE / cULus / C-Tick / GOST		✓	✓	✓
IEC 61557-12		✓	--	✓

¹⁾ This corresponds for example to a duration of 40 days with a measurement period length of 15 minutes.

²⁾ U_{nba}, I_{nba} - Unbalance with regard to amplitude

³⁾ U_{nb}, I_{nb} - Unbalance with regard to amplitude and phase

✓ Available
-- Not available

SENTRON Power Monitoring Devices

General data

*Measuring precisely with SENTRON PAC3100/3200/4200 -
New dimensions with the power monitoring devices*



The SENTRON PAC power monitoring devices:
PAC3200 (left), PAC3100 (center) and PAC4200 (right)

The power monitoring devices of the SENTRON PAC series are used to measure and indicate all relevant network parameters in low-voltage power distribution. They can be used for single-phase measurements as well as for multiphase measurements in 3 and 4-conductor networks (TN, TT, IT).

Power values for main distribution boards, electrical feeders or individual loads are recorded precisely and reliably, and important measured values are supplied in addition for assessing the state of the plant and the quality of the network.

Benefits

The common features of all power monitoring devices in the SENTRON PAC series:

- Simple mounting and commissioning
- Intuitive operation using 4 function keys and multilingual plain-text displays
- Easy adaptation to different systems using integrated
 - Digital inputs and outputs
 - Communication interface
- Global use
 - At least 8 languages
 - International approvals
 - Developed and tested in accordance with European and international standards
- Low mounting depth

Additional features of the SENTRON PAC3200 and SENTRON PAC4200:

- Precise power measurement
- Versatile system integration
 - Integrated Ethernet interface
 - Optional communication modules
 - Multifunctional digital inputs and outputs
 - Limit value monitoring

Additional features of the SENTRON PAC4200:

- Monitoring of the state of the plant and the quality of the network
 - Key data for assessing the quality of the network
 - Logging of plant history in the form of operation, control and system-related events
- Recording of the power characteristic in the form of power averages (load profile)
- SENTRON PAC4200 meets the high requirements according to IEC 61557-12. You can be sure therefore that performance, safety and operation characteristics will satisfy the demands of modern industrial plants and that the indicators of the measuring devices will supply clear results.

Application

Three-phase power monitoring devices are used to measure and indicate all relevant network parameters of an electrical installation and they monitor these parameters permanently.

Applications

Wherever power has to be distributed, be it in industrial or infrastructural buildings, the SENTRON PAC supplies important information to the building services system or the power controlling system.

The many different communication options offered by the SENTRON PAC make it an indispensable supplier of data for power management systems and for plant and building automation.

Industries

Power distribution systems for the power supply are needed in all sectors of industry. SENTRON PAC is used accordingly in all sectors where power consumption and electrical parameters are to be measured.


Integration of PAC3200 and PAC4200

When the SENTRON PAC3200 and PAC4200 are fully integrated in a power management system, they monitor the power consumption and help to monitor the operating state of the plant. Measured values, limit value violations, operating hours of a connected load or power flows are supplied by the instruments quickly and reliably.

Using the optionally available interface modules it is possible to integrate both instruments in every I&C system or every SIMATIC S7 environment.

System integration using function block libraries

Optionally available function block libraries make it easy to integrate the power monitoring devices in the SIMATIC PCS 7 process control system and the SCADA-System SIMATIC WinCC. Together with the faceplates as user interface for SENTRON PAC3200, the driver blocks and diagnostics blocks in the control system enable the operating and monitoring of technologically important values and functions of the measuring devices in the respective target system.

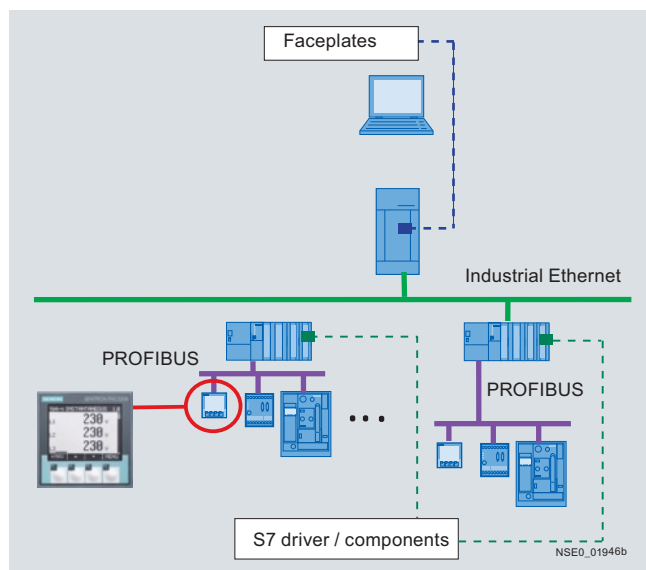


Integration of SENTRON PAC3200 in SIMATIC PCS 7 / WinCC

System integration of RS485 field bus devices through Ethernet

A special feature is the integrated gateway function of the SENTRON PAC4200. It enables a cost-effective and simple connection of devices with an RS485 interface to an Ethernet network.

Everything required is provided by the SENTRON PAC RS485 expansion module, to which a maximum of 31 lower-level devices can be connected without a repeater and as many as 247 with a repeater.

The gateway function of the SENTRON PAC4200 supports the Modbus or SEABus protocols and can be parameterized using SENTRON powerconfig.

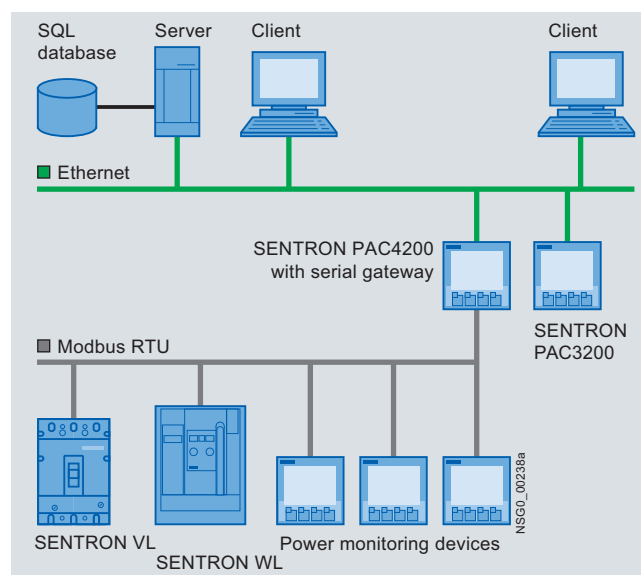

Connecting Modbus-RTU devices to a power management system through PAC4200



More information

More information is available on the Internet at www.siemens.com/powermanagementsystem

SENTRON Power Monitoring Devices

PAC3100 power monitoring devices

Selection and ordering data

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
  7KM3 133-0BA00-3AA0	SENTRON PAC3100 Control panel instrument 96 mm x 96 mm A Screw terminals for connecting current and voltage AC/DC power supply unit with wide voltage range U_{AUX} : 100 ... 240 V AC $\pm 10\%$, 50/60 Hz 110 ... 250 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 480/277 V, 50/60 Hz I_e : 15 A	Screw terminals					
		7KM3 133-0BA00-3AA0		1	1 unit	133	0.325




More information

Suitable current transformers can be found

- in Chapter 16 "SENTRON Switching and Protection Devices – Molded Case Circuit Breakers"
- in the Mall, Section "Low-Voltage Controls and Distribution" --> "Low-Voltage Power Distribution" --> "Switching and Protection Devices for Power Distribution" --> "Molded Case Circuit Breakers" --> "3VL Molded Case Circuit Breakers up to 1600 A" --> "Accessories and Spare Parts"

For more information about the software components of the Power Management System see Chapter 18 and on the Internet at www.siemens.com/powermanagementsystem

Selection and ordering data

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
 7KM2 112-0BA00-3AA0	SENTRON PAC3200		Screw terminals	1	1 unit	133	0.325
	Control panel instrument 96 mm x 96 mm A Screw terminals for connecting current and voltage AC/DC power supply unit with wide voltage range U_{AUX} : 95 ... 240 V AC $\pm 10\%$, 50/60 Hz 110 ... 340 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 690/400 V, 50/60 Hz I_e : /1 A or /5 A		7KM2 112-0BA00-3AA0				
 7KM2 111-1BA00-3AA0	SENTRON PAC3200		Screw terminals	1	1 unit	133	0.325
	Control panel instrument 96 mm x 96 mm A Screw terminals for connecting current and voltage DC power supply unit with extra-low voltage U_{AUX} : 22...65 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 500/289 V, 50/60 Hz I_e : /1 A or /5 A		7KM2 111-1BA00-3AA0				
 7KM2 112-0BA00-2AA0	SENTRON PAC3200		Cable lug terminals	1	1 unit	133	0.325
	Control panel instrument 96 mm x 96 mm A Cable lug terminals for connecting current and voltage AC/DC power supply unit with wide voltage range U_{AUX} : 95...240 V AC $\pm 10\%$, 50/60 Hz 110...340 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 690/400 V, 50/60 Hz I_e : /1 A or /5 A		7KM2 112-0BA00-2AA0				

Accessories

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
SIMATIC PCS 7 Library PAC3200							
Software for integration of the SENTRON PAC3200 in SIMATIC PCS 7							
• Engineering + Runtime license	B	3ZS2 781-1CC10-0YG0		1	1 unit	133	0.250
• Runtime license	B	3ZS2 781-1CC10-6YH0		1	1 unit	133	0.250
PAC3200 function block library for SIMATIC WinCC							
Software for integration of the SENTRON PAC3200 in SIMATIC WinCC							
• Engineering + Runtime license	B	3ZS2 791-1CC10-0YG0		1	1 unit	133	0.250
• Runtime license	B	3ZS2 791-1CC10-6YH0		1	1 unit	133	0.250

More information

- Suitable current transformers can be found
- in Chapter 16 "SENTRON Switching and Protection Devices – Molded Case Circuit Breakers"
- in the Mall, Section "Low-Voltage Controls and Distribution" --> "Low-Voltage Power Distribution" --> "Switching and Protection Devices for Power Distribution" -->

"Molded Case Circuit Breakers" --> "3VL Molded Case Circuit Breakers up to 1600 A" --> "Accessories and Spare Parts"







For more information about the software components of the Power Management System see Chapter 18 and on the Internet at www.siemens.com/powermanagementsystem

* You can order this quantity or a multiple thereof.

SENTRON Power Monitoring Devices

PAC4200 power monitoring devices

Selection and ordering data

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg		
  7KM4 112-0BA00-3AA0	A	SENTRON PAC4200		Screw terminals 		1	1 unit	133	0.450
		Control panel instrument 96 mm x 96 mm Screw terminals for connecting current and voltage AC/DC power supply unit with wide voltage range U_{AUX} : 95 ... 240 V AC $\pm 10\%$, 50/60 Hz 110 ... 340 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 690/400 V, 50/60 Hz I_e : /1 A or /5 A		7KM4 212-0BA00-3AA0					
  7KM4 112-0BA00-2AA0	A	SENTRON PAC4200		Cable lug terminals 		1	1 unit	133	0.450
		Control panel instrument 96 mm x 96 mm Cable lug terminals for connecting current and voltage AC/DC power supply unit with wide voltage range U_{AUX} : 95...240 V AC $\pm 10\%$, 50/60 Hz 110...340 V DC $\pm 10\%$ Measuring inputs U_e : max. 3 AC 690/400 V, 50/60 Hz I_e : /1 A or /5 A		7KM4 212-0BA00-2AA0					

More information

Suitable current transformers can be found

- in Catalog LV 1 · 2009, Chapter 16 "SENTRON Switching and Protection Devices – Molded Case Circuit Breakers"
- in the Mall, Section "Low-Voltage Controls and Distribution" --> "Low-Voltage Power Distribution" --> "Switching and Protection Devices for Power Distribution" --> "Molded Case Circuit Breakers" --> "3VL Molded Case Circuit Breakers up to 1600 A" --> "Accessories and Spare Parts"

For more information about the software components of the Power Management System see Chapter 18 and on the Internet at: www.siemens.com/powermanagementsystem

Overview



The PAC PROFIBUS DP expansion module has the following features:

- PROFIBUS DP plug-in communication module for SENTRON PAC3200 and PAC4200 power monitoring devices
- Parameterizable from the front of the device or using parameterization software
- Using PROFIBUS DPV1, data can be transferred in both cyclic and acyclic modes
- Easy integration using GSD file, with free choice of the measurement variables to be transmitted
- Plug and play
- All baud rates from 9.6 Kbit/s to 12 Mbit/s are supported
- Connection through 9-pole Sub-D connector according to IEC 61158
- No external auxiliary power necessary
- Status indication by LED on the module


Application

The SENTRON PAC PROFIBUS DP communication module is plugged onto the rear of the power monitoring device. The device identifies the module automatically and presents the parameters of relevance for this module for selection in the parameterization menu.

All measurement variables supplied by the SENTRON PAC power monitoring devices are selected and cyclically or acyclically transmitted by means of the GSD file.

The state of the module is indicated by an LED.

Selection and ordering data

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
 PAC PROFIBUS DP Expansion module for SENTRON PAC3200 and PAC4200 (PROFIBUS DP V1)	A	7KM9 300-0AB00-0AA0		1	1 unit	133	0.045

7KM9 300-0AB00-0AA0

SENTRON Power Monitoring Devices

Expansion modules PAC RS485

Overview



The PAC RS485 expansion module has the following features:


- PAC RS485 plug-in communication module for SENTRON PAC3200 and PAC4200 power monitoring devices
- Parameterizable from the front of the device or using parameterization software
- Support for Modbus RTU and SEAbus protocols
- Plug and play
- Baud rates of 4.8/9.6/19.2 and 38.4 kBd are supported
- Connection by means of 6-pole screw terminals
- No external auxiliary power necessary
- Status indication by LED on the module

Application

The SENTRON PAC RS485 communication module is plugged onto the rear of the PAC power monitoring devices. The device identifies the module automatically and presents the parameters of relevance for this module for selection in the parameterization menu. The state of the module is indicated by the integrated LED.

In connection with the SENTRON PAC power monitoring device, the Modbus RTU and SEAbus protocols are supported with baud rates of 4.8/9.6/19.2 and 38.4 kBd.

Selection and ordering data

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
 PAC RS485 Expansion module for SENTRON PAC3200 and PAC4200 (SEAbus and Modbus RTU)	A	7KM9 300-0AM00-0AA0		1	1 unit	133	0.041

7KM9 300-0AM00-0AA0