

# Absolute Encoders - Singleturn

Compact, magnetic


Sendix M3658 / M3678 (Shaft / Hollow shaft)

CANopen



The Sendix M3658 and Sendix M3678 Absolute Encoders - Singleturn with CANopen interface and magnetic sensor technology boast a resolution of 14 bits.

With a protection rating of up to IP69k, these encoders are resistant to shock and to extreme fluctuations in temperature, making them ideal for use in the most demanding outdoor applications.

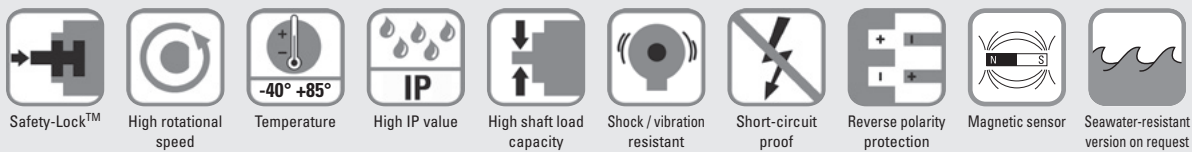

## Safe Technology


- Increased resistance against vibration and installation errors
- Sturdy bearing construction in Safety Lock™ Design
- Resistant die cast housing and protection up to IP69K

## Versatile Applications

- CANopen Encoder profile DS406 V3.2
- Fast determination of the operating status via two-colour LED
- With M12 connector or cable connection


## Safety-Lockplus™

IP69k protection on the flange side, robust bearing assemblies with interlocking bearings, mechanically protected shaft seal



## Sensor-Protect™

Fully encapsulated electronics, separate mechanical bearing assembly



## Order code Shaft version

8.M3658 . 2XCX . 21 1X  
Type                      a   b   c   d                      e                      f

**a** Flange  
2 = synchro flange

**b** Shaft (ø x L), with flat  
3 = ø 6 x 12,5 mm  
5 = ø 6,35 (1/4") x 12,5 mm  
6 = ø 8 x 12,5 mm

**c** Output circuit / Power supply  
C = CANopen DS301 V4.02 / 8 ... 30 V DC

**d** Type of connection  
2 = radial cable (1 m PUR)  
4 = M12 connector, radial

**e** Fieldbus profile  
21 = CANopen Encoder profile DS406 V3.2

**f** Protection  
1 = IP67  
2 = IP69K

optional on request  
- Ex 2/22  
- seawater-resistant  
- special cable length

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



## Order code Hollow shaft

8.M3678 . XXCX . 21 1X  
Type                      a   b   c   d                      e                      f

**a** Flange  
2 = with torque stop set  
5 = with stator coupling

**b** Hollow shaft  
2 = ø 6 mm  
3 = ø 6.35 mm (1/4")  
4 = ø 8 mm  
6 = ø 10 mm

**c** Output circuit / Power supply  
C = CANopen DS301 V4.02 / 8 ... 30 V DC

**d** Type of connection  
2 = radial cable (1 m PUR)  
4 = M12 connector, radial

**e** Fieldbus profile  
21 = CANopen Encoder profile DS406 V3.2

**f** Protection  
1 = IP67  
2 = IP69K

optional on request  
- Ex 2/22  
- seawater-resistant  
- special cable length

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.




# Absolute Encoders - Singleturn

<b>Compact, magnetic</b>	<b>Sendix M3658 / M3678 (Shaft / Hollow shaft)</b>	<b>CANopen</b>
--------------------------	--	----------------

## Mounting accessory for shaft encoders

<b>Coupling</b>	Bellows coupling $\varnothing$ 19 mm for shaft 6 mm	<b>8.0000.1101.0606</b>
-----------------	---	-------------------------

## Mounting accessory for hollow shaft encoders

<b>Cylindrical pin, long</b> for torque stops		With fixing thread	<b>8.0010.4700.0000</b>
--	---	--------------------	-------------------------

## Connection Technology

<b>Connector, self-assembly</b>	M12	<b>8.0000.5116.0000</b>
<b>Cordset, pre-assembled with 2 m PVC cable</b>	M12	<b>8.0000.6V81.0002</b>

## Programming set

including:	<ul style="list-style-type: none"> <li>- Interface converter USB-CAN</li> <li>- Connection cable from interface converter to encoder</li> <li>- Power supply 90 ... 250 V AC</li> <li>- DVD with Ezturn® software</li> </ul>	<b>Minimum System Requirements:</b> Operating system: Windows XP SP3 or higher Win7 in preparation Processor: 1 GHz RAM : 512 MB Required disk space: 500 MB	<b>8.0010.9000.0015</b>
------------	--	---	-------------------------

Further accessories can be found in the Accessories section or in the Accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
 Additional connectors can be found in the Connection Technology section or in the Connection Technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

Mechanical characteristics	
<b>Max. speed</b>	6000 min <sup>-1</sup>
<b>Starting torque</b>	< 0.06 Nm
<b>Load capacity of shaft</b>	radial 40 N axial 20 N
<b>Weight</b>	ca. 0.2 kg
<b>Protection EN 60 529/DIN 40050-9</b>	IP67 / IP69k
<b>EX approval for hazardous areas</b>	optional Zone 2 and 22
<b>Working temperature range</b>	-40°C ... +85°C
<b>Materials</b>	shaft/hollow shaft stainless steel flange aluminium housing zinc die-cast housing cable PUR
<b>Shock resistance acc. EN 60068-2-27</b>	5000 m/s <sup>2</sup> , 6 ms
<b>Vibration resistance acc. EN 60068-2-6</b>	300 m/s <sup>2</sup> , 10 ... 2000 Hz
<b>Permanent shock resistance acc. EN 60068-2-27</b>	1000 m/s <sup>2</sup> , 2 ms
<b>Vibration (broad-band random) EN 60068-2-64</b>	5 ... 2500 Hz, 100 m/s <sup>2</sup> - rms
<b>RoHS compliant acc. to</b>	EU guideline 2002/95/EG
<b>CE compliant acc. to</b>	EN 61000-6-2, EN 61000-6-4, EN 61000-6-3, EN 61000-4-8 (behaviour under magnetic influence)


Interface characteristics CANopen	
<b>Resolution</b>	1 ... 16384 (14 bit), (scaleable: 1 ... 16384)
<b>Default value</b>	16384 (14 bit)
<b>Code</b>	Binary
<b>Interface</b>	CAN High-Speed according to ISO 11898, Basic- and Full-CAN, CAN Specification 2.0 B
<b>Protocol</b>	CANopen profile DS406 V3.2 with manufacturer-specific add-ons LSS-Service DS305 V2.0
<b>Baud rate</b>	10 ... 1000 kbit/s (Software configurable)
<b>Node address</b>	1 ... 127 (Software configurable)
<b>Termination switchable</b>	Software configurable
<b>LSS Protocol</b>	CIA LSS protocol DS305 Global command support for node address and baud rate. Selective commands via attributes of the identity object.

## General electrical characteristics

<b>Power supply</b>	5 ... 30 V DC
<b>Current consumption (no load)</b>	max. 25 mA
<b>Reverse connection of the supply voltage (U<sub>B</sub>)</b>	yes
<b>Measuring range</b>	360°
<b>Linearity</b>	< 1°
<b>Repeat accuracy (25°C)</b>	< 0.1°
<b>Data refresh rate</b>	400 $\mu$ s
<b>Status LED</b>	LED ON or blinking red Error display LED ON or blinking green Status display

## Terminal assignment

Signal	+U <sub>B</sub>	0 V	CAN GND	CAN High	CAN Low
M12 / Pin	2	3	1	4	5
Cable colour	BN	WH	GY	GN	YE



# Absolute Encoders - Singleturn

## Compact, magnetic

## Sendix M3658 / M3678 (Shaft / Hollow shaft)

## CANopen

### General information about CANopen

The CANopen encoders of the M3658 and M3678 series support the latest CANopen communication profile according to DS301 V4.02. In addition, device specific profiles like the encoder profile DS406 V3.2 are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CANbus.

When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

The following output values may be combined in a freely variable way as PDO (PDO mapping): position, speed as well as the status of the working area.

The encoders are available with a connector or a cable connection.

The device address and baud rate can be set/modified by means of the software. The two colour LED located on the back indicates the operating or fault status of the CAN bus, as well as the status of the internal diagnostics.

### CANopen Communication Profile DS301 V4.02

Among others, the following functionality is integrated.

Class C2 functionality:

- NMT Slave
- Heartbeat Protocol
- Identity Object
- Error Behaviour Object
- Variable PDO Mapping self-start programmable (Power on to operational), 3 Sending PDO's
- Node address, baud rate and CANbus / Programmable termination

### CANopen Encoder Profile DS406 V3.2

The following parameters can be programmed:

- Event mode
  - 1 work area with upper and lower limit and the corresponding output states
  - Variable PDO mapping for position, speed, work area status
  - Extended failure management for position sensing with integrated temperature control
  - User interface with visual display of bus and failure status 1 LED two colours
  - Customer-specific memory - 16 Bytes
  - Customer-specific protocol
- "Watchdog controlled" device

### LSS Layer Setting Services DS305 V2.0

- Global support of Node-ID and baud rate
- Selective protocol via identity object (1018h)

### CANbus Connection

The CANopen encoders are equipped with a Bus trunk line in various lengths and can be terminated in the device.

The devices do not have an integrated T-coupler nor they are looped internally and must therefore only be used as end devices.

If possible, drop lines should be avoided, as in principle they lead to signal reflections. As a rule the reflections caused by the drop lines are not critical, if they have completely decayed before the point in time when the scanning occurs.

The sum of all the drop lines should not, for a particular baud rate, exceed the maximum length  $L_u$ .

$L_u < 5$  m cable length for 125 Kbit

$L_u < 2$  m cable length for 250 Kbit

$L_u < 1$  m cable length for 1 Mbit

When used as a drop line, the termination resistor should not be activated.

For a network with 3 encoders and 250 Kbit the maximum length of the drop line/encoder must not exceed 70 cm.


# Absolute Encoders - Singleturn

<b>Compact, magnetic</b>	<b>Sendix M3658 / M3678 (Shaft / Hollow shaft)</b>	<b>CANopen</b>
--------------------------	--	----------------


## Dimensions shaft version

Synchro flange,  $\varnothing$  36 mm

1 M3, 6 [0.24] deep

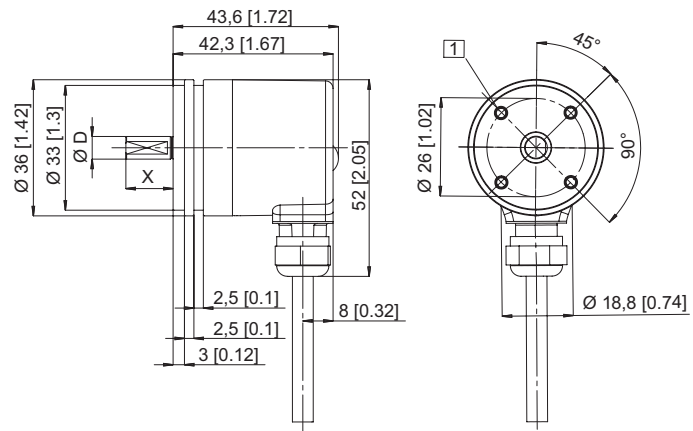


1 M3, 6 [0.24] deep

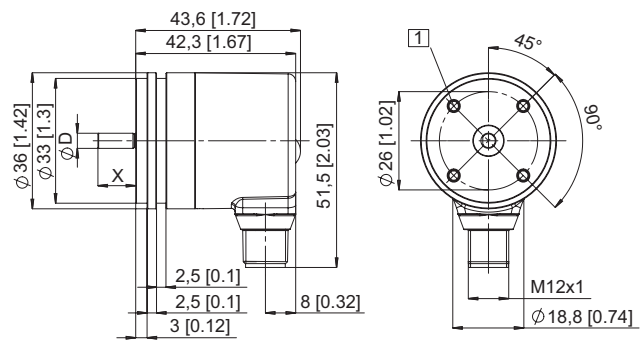

## Dimensions hollow shaft version

With torque stop set,  $\varnothing$  36 mm

1 Torque stop slot,  
Recommendation: Cylindrical pin DIN7,  $\varnothing$  4 mm

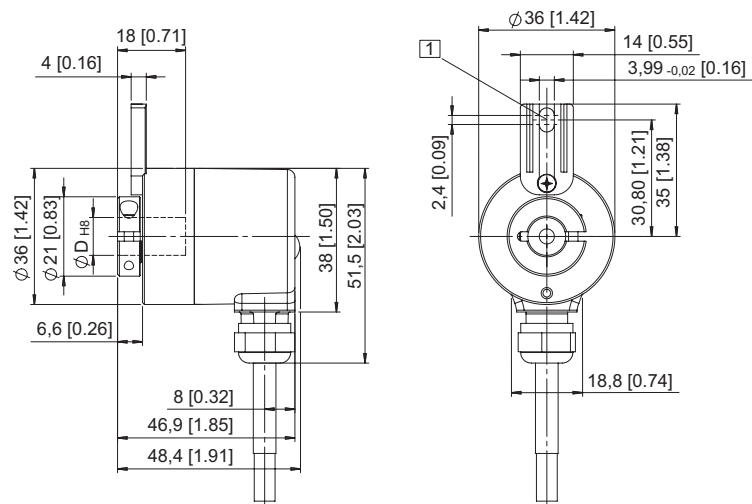

With stator coupling,  $\varnothing$  36 mm

